

Summary for CLM-226xx/227xx/228xx OpenRack

Features :

- Easily assembled and dismantled
- Width variability due to adaptor design
- Innovative cabinet constructed square-pipe main frame
- Flat-package for saving transportation and warehouse cost
- Loading Capacity up to 500 kgs
- Symmetrical frame structure
- Cable entry via roof & bottom panel
- Adjustable depth stay punched in 25 pitch pattern to combine any brand's component
- Modular roof / door / base configuration
- Screw fastened frame structure
- Castors & leveling feet included
- 19" EIA RS-310-D / ANSI /E,TSI,DN-19 , RoHS compliant
- Black & Beige for color selection

● Dimensions

Width : 600 mm,700mm,800mm.

Depth : 300mm,350mm,400mm,450mm,500mm,550mm,600mm, 650mm,700mm,750mm,800mm,850mm,900mm,950mm, 1000mm,1050mm , 1100mm,1150mm,1200mm.

Height : 12U~48U (1U=44.45mm)

Please see page No. G24~G29

● Meaning Of Serial Numbers

CLM-226XX-XX (W)600X(D)X(H)

CLM-227XX-XX (W)700X(D)X(H)

CLM-228XX-XX (W)800X(D)X(H)

The **green color** is the meaning of **width**.

The **red color** is the meaning of **depth**.

The **light blue color** is the meaning of **height**.

● Finished:

Power coating in color RAL7035(Beige) or RAL9011(Black) as standard.

CLM-226/227/228
OPENRACK



Welded Posiotion (Optional)

AA Type



● Categories Of Packages

● Package of Roof & plinth (CLM-882414)

Roof (CLM-882440-xxx)	G29
Plinth (CLM-882421-xxx)	G29
Accessory : 8 x Hexagon CAP M6 (CLM-662025-45)	
1 x L-shaped spanner (CLM-662100-06)	
32 x Self-tapping screw M4 (CLM-662125-10)	
25/50 x Self-tapping washer screw M6 (CLM-662009-12)	
25/50 x Cage Nut M6 (CLM-882003-06)	
6 x Dividing Piece (CLM-612769-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Main Frames & Mounting Angles (CLM-882424)

4 x Main Frame (CLM-882204-xx)	
4 x F-shaped Mounting Angles (CLM-612553-24xx)	G31
Accessory : 8 x Washers of F-shaped mounting angle (CLM-612590-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Leveling Feet & Castor

Package of Castor & Leveling Feet of Height=12U~24U	
4 x Castor (CLM-662142-00)	G32
4 x Leveling Feet (CLM-662031-60)	G32
Accessory : 4 x Ring Washer (CLM-662029-12)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	
Package of Castor of Height=25U~48U (CLM-882373-00)	
4 x Castor (CLM-662030-7538)	G32
Accessory : 1 x Tool (CLM-612667-005)	
Package of Leveling Feet of Height=25U~48U (CLM-882214-00)	

● Package of Depth Stays (CLM-882322)

2 x Depth Stays	G30~G31
Accessory : 16 x Self-tapping screw 12#24 (CLM-662056-10)	

Summary for CLM-226xx/227xx/228xx OpenRack

Applications :

- Data distribution enclosure
- Comonnet enclosure
- Telecommunication
- Industrial and office environments
- Security technology
- Basic system for numerous customer-specific applications
- Need of changing position
- Indoor Use



Stanard

Join Kit (612666)

CLM-226/227/228
OPENRACK

Front View



Rear View








Construction Overview CLM-226 / 227 / 228



CLM-226/227/228
OPENRACK

CLM-226xx/227xx/228xx Series Overview

19",21",23",24" Open Rack for Network



Standard Equipment: (Included)

1. CLM-882440-xxx Roof..... G29
2. CLM-882421-xxx PlinthG29
3. CLM-882204-xx Main Frame
4. Depth Stays..... G30-G31
5. CLM-612553-24xx F-shaped Vertical Mounting Angle.. G31
6. Castor & Leveling Feet G32

Extention Accessories : (Optional)

1. CLM-882233 Vented Roof Panel with Fans.....E112
2. CLM-882230 Vented Roof PanelE112
3. CLM-882216 Bevel Roof PanelE112
4. CLM-882233 Square-Vented Roof Panel.....E112
5. CLM-882206 R-shaped Vented Front Door.....E112
6. CLM-882278 Vented Mesh Front Door.....E112
7. CLM-882239 Tempered Front Door.....E112
8. CLM-882335 Vented Honeycomb Front Door.....E112
9. CLM-882232 Vented Tempered Front Door.....E112
10. CLM-882422 Vented Tempered Front Door.....E112
11. CLM-882407 Vented Air-flow Rear Door.....E112
12. CLM-882334 Vented Mesh Rear Door.....E112
13. CLM-882269 Flat Rear Door.....E112
14. CLM-882357 Vented Honeycomb Rear Door.....E112
15. CLM-882267 Vented Rear Door.....E112
16. CLM-882268 Vented Air-flow Rear Door.....E112
17. CLM-882234 L-shaped stays.....E112
18. CLM-882212 Side Panel.....E112

Extention Accessories : (Optional)

1. CLM-882033 Overlapped component shelf..... K1
2. CLM-882026 adjustable Component shelf..... K1
3. CLM-882060 Vented adjustable component shelf..... K1
4. CLM-882104 1U Fixed vented component shelf K2
5. CLM-882105 Twin-arm vented component shelf..... K2
6. CLM-882025 Telescopic Slide rails Component shelf..... K2
7. CLM-882030 Drawer 1U,2U,3U..... K2-K3
8. CLM-882103 Support angles component shelf..... E64
9. CLM-612027 blanking panels (Metal)..... K18
- CLM-612001 blanking panels (AL) K18
10. CLM-312002-17/30 Earth straps..... K29
11. CLM-512007 Cable wiring duct..... K21
12. CLM-612199 Cable shunting rings Metal..... K19
13. CLM-882051 2 Section server rail K9-K17
- CLM-882052 2 Section server rail K9-K17
- CLM-882053 3 Section server rail K9-K17
- CLM-882054 3 Sections server rail..... K9-K17
14. CLM-612030 Cable clamp rails..... K20
15. CLM-958 14"/15" monitor enclosure..... K3
- CLM-950 17"monitor enclosure..... K3
16. CLM-882061 Power socket strip with mounting strip K30
17. CLM-612274 Various Patch panels.....K22-K27
18. CLM-882066 Cable entry with brush strips K19-K20
19. CLM-911/2 keyboard drawer & track ball with Telescopic slide rails K4
20. CLM-882003 Cage Nuts K33-K40
21. CLM-662009 Shelf-tapping washers screws.....K33-K40
22. CLM-882199 Cable management set K19
23. CLM-882129 Component shelf..... E64
24. CLM-882089 Cable shunting ring strip..... K19-1
25. CLM-882138-xx Cooling fan rings..... K41
26. CLM-882142 Cabling management strip..... K20
27. CLM-882170-00 1U rack-mounted 3fans..... E65
- CLM-882171-xx 1U rack-mounted 6fans E65
- CLM-882172-xx 1U rack-mounted 9fans E65

CLM-226/227/228
OPENRACK

CLM-226xx-xxAC OpenRack

19" width for server & communication system

CLM-226xx-xxAC

D.I.Y.




12U~24U

Application



CLM-226/227/228
OPENRACK

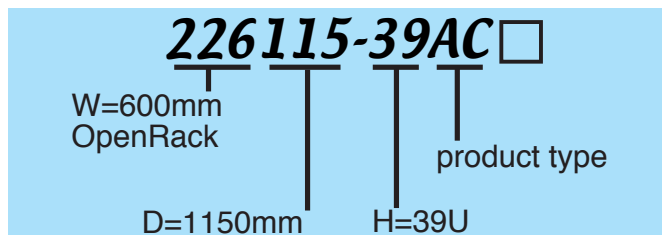

Catagories in D.I.Y. Packages

● Package of Roof & plinth (CLM-882414)

Roof (CLM-882440-6xx)	G29
Plinth (CLM-882421-6xx)	G29
Accessory : 8 x Hexagon CAP M6 (CLM-662025-45)	
1 x L-shaped spanner (CLM-662100-06)	
32 x Self-tapping screw M4 (CLM-662125-10)	
25/50 x Self-tapping washer screw M6 (CLM-662009-12)	
25/50 x Cage Nut M6 (CLM-882003-06)	
6 x Dividing Piece (CLM-612769-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Main Frames & Mounting Angles (CLM-882424)

4 x Main Frame (CLM-882204-xx)	G29
4 x F-shaped Mounting Angles (CLM-612553-24xx)	G29
Accessory : 8 x Washers of F-shaped mounting angle (CLM-612590-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Leveling Feet & Castor

Package of Castor & Leveling Feet of Height=12U~24U (CLM-882349)	
4 x Castor (CLM-662142-00)	G32
4 x Leveling Feet (CLM-662031-60)	G32
Accessory : 4 x Ring Washer (CLM-662029-12)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	
Package of Castor of Height=25U~48U (CLM-882373-00)	
4 x Castor (CLM-662030-7538)	G32
Accessory : 1 x Tool (CLM-612667-005)	
Package of Leveling Feet of Height=25U~48U (CLM-882214-00)	


● Package of Depth Stays (CLM-882322)

2 x Depth Stays	G30~G31
Accessory : 16 x Self-tapping screw 12#24 (CLM-662056-10)	

"D.I.Y." exporting flat-package for saving long distance transportation and warehouse cost



Welding Posiition

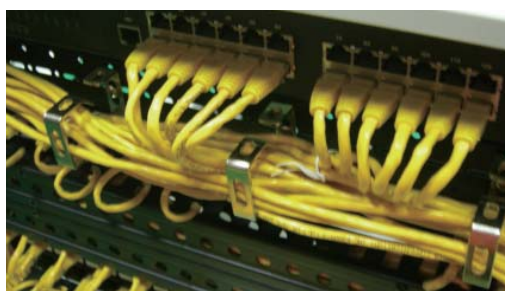

G23

Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm	700mm	750mm
12	21	600	700	W=600mm	22630-12AC	22635-12AC	22640-12AC	22645-12AC	22650-12AC	22655-12AC	22660-12AC	22665-12AC	22670-12AC	22675-12AC
14	25	700	800	W=600mm	22630-14AC	22635-14AC	22640-14AC	22645-14AC	22650-14AC	22655-14AC	22660-14AC	22665-14AC	22670-14AC	22675-14AC
16	29	800	900	W=600mm	22630-16AC	22635-16AC	22640-16AC	22645-16AC	22650-16AC	22655-16AC	22660-16AC	22665-16AC	22670-16AC	22675-16AC
18	33	900	1000	W=600mm	22630-18AC	22635-18AC	22640-18AC	22645-18AC	22650-18AC	22655-18AC	22660-18AC	22665-18AC	22670-18AC	22675-18AC
21	37	1000	1100	W=600mm	22630-21AC	22635-21AC	22640-21AC	22645-21AC	22650-21AC	22655-21AC	22660-21AC	22665-21AC	22670-21AC	22675-21AC
23	41	1100	1200	W=600mm	22630-23AC	22635-23AC	22640-23AC	22645-23AC	22650-23AC	22655-23AC	22660-23AC	22665-23AC	22670-23AC	22675-23AC
25	45	1200	1300	W=600mm	22630-25AC	22635-25AC	22640-25AC	22645-25AC	22650-25AC	22655-25AC	22660-25AC	22665-25AC	22670-25AC	22675-25AC
27	49	1300	1400	W=600mm	22630-27AC	22635-27AC	22640-27AC	22645-27AC	22650-27AC	22655-27AC	22660-27AC	22665-27AC	22670-27AC	22675-27AC
30	53	1400	1500	W=600mm	22630-30AC	22635-30AC	22640-30AC	22645-30AC	22650-30AC	22655-30AC	22660-30AC	22665-30AC	22670-30AC	22675-30AC
32	57	1500	1600	W=600mm	22630-32AC	22635-32AC	22640-32AC	22645-32AC	22650-32AC	22655-32AC	22660-32AC	22665-32AC	22670-32AC	22675-32AC
34	61	1600	1700	W=600mm	22630-34AC	22635-34AC	22640-34AC	22645-34AC	22650-34AC	22655-34AC	22660-34AC	22665-34AC	22670-34AC	22675-34AC
36	65	1700	1800	W=600mm	22630-36AC	22635-36AC	22640-36AC	22645-36AC	22650-36AC	22655-36AC	22660-36AC	22665-36AC	22670-36AC	22675-36AC
39	69	1800	1900	W=600mm	22630-39AC	22635-39AC	22640-39AC	22645-39AC	22650-39AC	22655-39AC	22660-39AC	22665-39AC	22670-39AC	22675-39AC
41	73	1900	2000	W=600mm	22630-41AC	22635-41AC	22640-41AC	22645-41AC	22650-41AC	22655-41AC	22660-41AC	22665-41AC	22670-41AC	22675-41AC
43	77	2000	2100	W=600mm	22630-43AC	22635-43AC	22640-43AC	22645-43AC	22650-43AC	22655-43AC	22660-43AC	22665-43AC	22670-43AC	22675-43AC
45	81	2100	2200	W=600mm	22630-45AC	22635-45AC	22640-45AC	22645-45AC	22650-45AC	22655-45AC	22660-45AC	22665-45AC	22670-45AC	22675-45AC
48	85	2200	2300	W=600mm	22630-48AC	22635-48AC	22640-48AC	22645-48AC	22650-48AC	22655-48AC	22660-48AC	22665-48AC	22670-48AC	22675-48AC

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	21	600	700	W=600mm	22680-12AC	22685-12AC	22690-12AC	22695-12AC	226100-12AC	226105-12AC	226110-12AC	226115-12AC	226120-12AC
14	25	700	800	W=600mm	22680-14AC	22685-14AC	22690-14AC	22695-14AC	226100-14AC	226105-14AC	226110-14AC	226115-14AC	226120-14AC
16	29	800	900	W=600mm	22680-16AC	22685-16AC	22690-16AC	22695-16AC	226100-16AC	226105-16AC	226110-16AC	226115-16AC	226120-16AC
18	33	900	1000	W=600mm	22680-18AC	22685-18AC	22690-18AC	22695-18AC	226100-18AC	226105-18AC	226110-18AC	226115-18AC	226120-18AC
21	37	1000	1100	W=600mm	22680-21AC	22685-21AC	22690-21AC	22695-21AC	226100-21AC	226105-21AC	226110-21AC	226115-21AC	226120-21AC
23	41	1100	1200	W=600mm	22680-23AC	22685-23AC	22690-23AC	22695-23AC	226100-23AC	226105-23AC	226110-23AC	226115-23AC	226120-23AC
25	45	1200	1300	W=600mm	22680-25AC	22685-25AC	22690-25AC	22695-25AC	226100-25AC	226105-25AC	226110-25AC	226115-25AC	226120-25AC
27	49	1300	1400	W=600mm	22680-27AC	22685-27AC	22690-27AC	22695-27AC	226100-27AC	226105-27AC	226110-27AC	226115-27AC	226120-27AC
30	53	1400	1500	W=600mm	22680-30AC	22685-30AC	22690-30AC	22695-30AC	226100-30AC	226105-30AC	226110-30AC	226115-30AC	226120-30AC
32	57	1500	1600	W=600mm	22680-32AC	22685-32AC	22690-32AC	22695-32AC	226100-32AC	226105-32AC	226110-32AC	226115-32AC	226120-32AC
34	61	1600	1700	W=600mm	22680-34AC	22685-34AC	22690-34AC	22695-34AC	226100-34AC	226105-34AC	226110-34AC	226115-34AC	226120-34AC
36	65	1700	1800	W=600mm	22680-36AC	22685-36AC	22690-36AC	22695-36AC	226100-36AC	226105-36AC	226110-36AC	226115-36AC	226120-36AC
39	69	1800	1900	W=600mm	22680-39AC	22685-39AC	22690-39AC	22695-39AC	226100-39AC	226105-39AC	226110-39AC	226115-39AC	226120-39AC
41	73	1900	2000	W=600mm	22680-41AC	22685-41AC	22690-41AC	22695-41AC	226100-41AC	226105-41AC	226110-41AC	226115-41AC	226120-41AC
43	77	2000	2100	W=600mm	22680-43AC	22685-43AC	22690-43AC	22695-43AC	226100-43AC	226105-43AC	226110-43AC	226115-43AC	226120-43AC
45	81	2100	2200	W=600mm	22680-45AC	22685-45AC	22690-45AC	22695-45AC	226100-45AC	226105-45AC	226110-45AC	226115-45AC	226120-45AC
48	85	2200	2300	W=600mm	22680-48AC	22685-48AC	22690-48AC	22695-48AC	226100-48AC	226105-48AC	226110-48AC	226115-48AC	226120-48AC

The green color is the meaning for it's Width.
The red color is the meaning for it's Depth.
The light blue color is the meaning for it's Height.

Color choose :
5 - RAL7035 ☐ White
1 - RAL9011 ☐ Black

Side panel



Join Kit



Strengthening bar



Front Mounting



Rear Mounting

CLM-227xx-xxAC OpenRack

19"/21"/23" width for server & communication system

CLM-227xx-xxAC


D.I.Y.



Application



CLM-226/227/228
OPENRACK

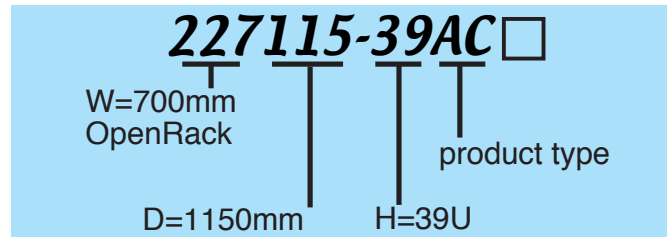

Catagories in D.I.Y. Packages

● Package of Roof & plinth (CLM-882414)

Roof (CLM-882440-7xx)	G29
Plinth (CLM-882421-7xx)	G29
Accessory : 8 x Hexagon CAP M6 (CLM-662025-45)	
1 x L-shaped spanner (CLM-662100-06)	
32 x Self-tapping screw M4 (CLM-662125-10)	
25/50 x Self-tapping washer screw M6 (CLM-662009-12)	
25/50 x Cage Nut M6 (CLM-882003-06)	
6 x Dividing Piece (CLM-612769-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Main Frames & Mounting Angles (CLM-882424)

4 x Main Frame (CLM-882204-xx)	
4 x F-shaped Mounting Angles (CLM-612553-24xx)	G31
Accessory : 8 x Washers of F-shaped mounting angle (CLM-612590-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Leveling Feet & Castor

Package of Castor & Leveling Feet of Height=12U~24U (CLM-882349)	
4 x Castor (CLM-662142-00)	G32
4 x Leveling Feet (CLM-662031-60)	G32
Accessory : 4 x Ring Washer (CLM-662029-12)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	
Package of Castor of Height=25U~48U (CLM-882373-00)	
4 x Castor (CLM-662030-7538)	G32
Accessory : 1 x Tool (CLM-612667-005)	
Package of Leveling Feet of Height=25U~48U (CLM-882214-00)	

● Package of Depth Stays (CLM-882220)

2 x Depth Stays	G30~G31
Accessory : 16 x Self-tapping screw 12#24 (CLM-662056-10)	

"D.I.Y." exporting flat-package for saving long distance transportation and warehouse cost



Welding Posiition



G25

Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm	700mm	750mm
12	21	600	700	W=700mm	22730-12AC	22735-12AC	22740-12AC	22745-12AC	22750-12AC	22755-12AC	22760-12AC	22765-12AC	22770-12AC	22775-12AC
14	25	700	800	W=700mm	22730-14AC	22735-14AC	22740-14AC	22745-14AC	22750-14AC	22755-14AC	22760-14AC	22765-14AC	22770-14AC	22775-14AC
16	29	800	900	W=700mm	22730-16AC	22735-16AC	22740-16AC	22745-16AC	22750-16AC	22755-16AC	22760-16AC	22765-16AC	22770-16AC	22775-16AC
18	33	900	1000	W=700mm	22730-18AC	22735-18AC	22740-18AC	22745-18AC	22750-18AC	22755-18AC	22760-18AC	22765-18AC	22770-18AC	22775-18AC
21	37	1000	1100	W=700mm	22730-21AC	22735-21AC	22740-21AC	22745-21AC	22750-21AC	22755-21AC	22760-21AC	22765-21AC	22770-21AC	22775-21AC
23	41	1100	1200	W=700mm	22730-23AC	22735-23AC	22740-23AC	22745-23AC	22750-23AC	22755-23AC	22760-23AC	22765-23AC	22770-23AC	22775-23AC
25	45	1200	1300	W=700mm	22730-25AC	22735-25AC	22740-25AC	22745-25AC	22750-25AC	22755-25AC	22760-25AC	22765-25AC	22770-25AC	22775-25AC
27	49	1300	1400	W=700mm	22730-27AC	22735-27AC	22740-27AC	22745-27AC	22750-27AC	22755-27AC	22760-27AC	22765-27AC	22770-27AC	22775-27AC
30	53	1400	1500	W=700mm	22730-30AC	22735-30AC	22740-30AC	22745-30AC	22750-30AC	22755-30AC	22760-30AC	22765-30AC	22770-30AC	22775-30AC
32	57	1500	1600	W=700mm	22730-32AC	22735-32AC	22740-32AC	22745-32AC	22750-32AC	22755-32AC	22760-32AC	22765-32AC	22770-32AC	22775-32AC
34	61	1600	1700	W=700mm	22730-34AC	22735-34AC	22740-34AC	22745-34AC	22750-34AC	22755-34AC	22760-34AC	22765-34AC	22770-34AC	22775-34AC
36	65	1700	1800	W=700mm	22730-36AC	22735-36AC	22740-36AC	22745-36AC	22750-36AC	22755-36AC	22760-36AC	22765-36AC	22770-36AC	22775-36AC
39	69	1800	1900	W=700mm	22730-39AC	22735-39AC	22740-39AC	22745-39AC	22750-39AC	22755-39AC	22760-39AC	22765-39AC	22770-39AC	22775-39AC
41	73	1900	2000	W=700mm	22730-41AC	22735-41AC	22740-41AC	22745-41AC	22750-41AC	22755-41AC	22760-41AC	22765-41AC	22770-41AC	22775-41AC
43	77	2000	2100	W=700mm	22730-43AC	22735-43AC	22740-43AC	22745-43AC	22750-43AC	22755-43AC	22760-43AC	22765-43AC	22770-43AC	22775-43AC
45	81	2100	2200	W=700mm	22730-45AC	22735-45AC	22740-45AC	22745-45AC	22750-45AC	22755-45AC	22760-45AC	22765-45AC	22770-45AC	22775-45AC
48	85	2200	2300	W=700mm	22730-48AC	22735-48AC	22740-48AC	22745-48AC	22750-48AC	22755-48AC	22760-48AC	22765-48AC	22770-48AC	22775-48AC

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	21	600	700	W=700mm	22780-12AC	22785-12AC	22790-12AC	22795-12AC	227100-12AC	227105-12AC	227110-12AC	227115-12AC	227120-12AC
14	25	700	800	W=700mm	22780-14AC	22785-14AC	22790-14AC	22795-14AC	227100-14AC	227105-14AC	227110-14AC	227115-14AC	227120-14AC
16	29	800	900	W=700mm	22780-16AC	22785-16AC	22790-16AC	22795-16AC	227100-16AC	227105-16AC	227110-16AC	227115-16AC	227120-16AC
18	33	900	1000	W=700mm	22780-18AC	22785-18AC	22790-18AC	22795-18AC	227100-18AC	227105-18AC	227110-18AC	227115-18AC	227120-18AC
21	37	1000	1100	W=700mm	22780-21AC	22785-21AC	22790-21AC	22795-21AC	227100-21AC	227105-21AC	227110-21AC	227115-21AC	227120-21AC
23	41	1100	1200	W=700mm	22780-23AC	22785-23AC	22790-23AC	22795-23AC	227100-23AC	227105-23AC	227110-23AC	227115-23AC	227120-23AC
25	45	1200	1300	W=700mm	22780-25AC	22785-25AC	22790-25AC	22795-25AC	227100-25AC	227105-25AC	227110-25AC	227115-25AC	227120-25AC
27	49	1300	1400	W=700mm	22780-27AC	22785-27AC	22790-27AC	22795-27AC	227100-27AC	227105-27AC	227110-27AC	227115-27AC	227120-27AC
30	53	1400	1500	W=700mm	22780-30AC	22785-30AC	22790-30AC	22795-30AC	227100-30AC	227105-30AC	227110-30AC	227115-30AC	227120-30AC
32	57	1500	1600	W=700mm	22780-32AC	22785-32AC	22790-32AC	22795-32AC	227100-32AC	227105-32AC	227110-32AC	227115-32AC	227120-32AC
34	61	1600	1700	W=700mm	22780-34AC	22785-34AC	22790-34AC	22795-34AC	227100-34AC	227105-34AC	227110-34AC	227115-34AC	227120-34AC
36	65	1700	1800	W=700mm	22780-36AC	22785-36AC	22790-36AC	22795-36AC	227100-36AC	227105-36AC	227110-36AC	227115-36AC	227120-36AC
39	69	1800	1900	W=700mm	22780-39AC	22785-39AC	22790-39AC	22795-39AC	227100-39AC	227105-39AC	227110-39AC	227115-39AC	227120-39AC
41	73	1900	2000	W=700mm	22780-41AC	22785-41AC	22790-41AC	22795-41AC	227100-41AC	227105-41AC	227110-41AC	227115-41AC	227120-41AC
43	77	2000	2100	W=700mm	22780-43AC	22785-43AC	22790-43AC	22795-43AC	227100-43AC	227105-43AC	227110-43AC	227115-43AC	227120-43AC
45	81	2100	2200	W=700mm	22780-45AC	22785-45AC	22790-45AC	22795-45AC	227100-45AC	227105-45AC	227110-45AC	227115-45AC	227120-45AC
48	85	2200	2300	W=700mm	22780-48AC	22785-48AC	22790-48AC	22795-48AC	227100-48AC	227105-48AC	227110-48AC	227115-48AC	227120-48AC

The green color is the meaning for it's Width.
The red color is the meaning for it's Depth.
The light blue color is the meaning for it's Height.

Color choose :
5 - RAL7035 White
1 - RAL9011 Black

Side panel



Join Kit



Strengthening bar



Front Mounting




Rear Mounting

CLM-228xx-xxAC OpenRack

19"/21"/23"/24" width for server & communication system

CLM-228xx-xxAC

D.I.Y.

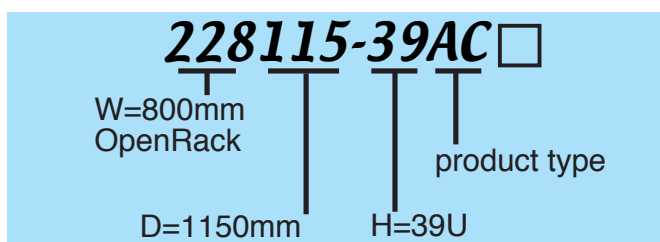

Catagories in D.I.Y. Packages

● Package of Roof & plinth (CLM-882414)

Roof (CLM-882440-8xx)	G29
Plinth (CLM-882421-8xx)	G29
Accessory : 8 x Hexagon CAP M6 (CLM-662025-45)	
1 x L-shaped spanner (CLM-662100-06)	
32 x Self-tapping screw M4 (CLM-662125-10)	
25/50 x Self-tapping washer screw M6 (CLM-662009-12)	
25/50 x Cage Nut M6 (CLM-882003-06)	
6 x Dividing Piece (CLM-612769-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Main Frames & Mounting Angles (CLM-882424)

4 x Main Frame (CLM-882204-xx)	
4 x F-shaped Mounting Angles (CLM-612553-24xx)	G31
Accessory : 8 x Washers of F-shaped mounting angle (CLM-612590-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Leveling Feet & Castor

Package of Castor & Leveling Feet of Height=12U~24U (CLM-882349)	
4 x Castor (CLM-662142-00)	G32
4 x Leveling Feet (CLM-662031-60)	G32
Accessory : 4 x Ring Washer (CLM-662029-12)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	
Package of Castor of Height=25U~48U (CLM-882373-00)	
4 x Castor (CLM-662030-7538)	G32
Accessory : 1 x Tool (CLM-612667-005)	
Package of Leveling Feet of Height=25U~48U (CLM-882214-00)	

● Package of Depth Stays (CLM-882220)


2 x Depth Stays	G30~G31
Accessory : 16 x Self-tapping screw 12#24 (CLM-662056-10)	

"D.I.Y." exporting flat-package for saving long distance transportation and warehouse cost


Application



CLM-226/227/228
OPENRACK



Welding Posiition

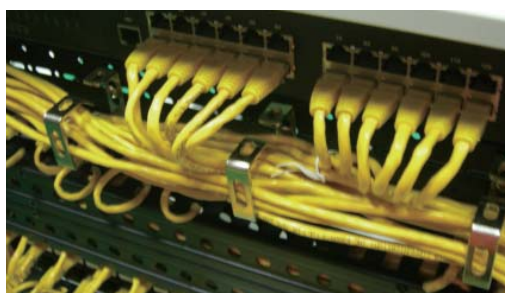

G27

Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm	700mm	750mm
12	21	600	700	W=800mm	22830-12AC	22835-12AC	22840-12AC	22845-12AC	22850-12AC	22855-12AC	22860-12AC	22865-12AC	22870-12AC	22875-12AC
14	25	700	800	W=800mm	22830-14AC	22835-14AC	22840-14AC	22845-14AC	22850-14AC	22855-14AC	22860-14AC	22865-14AC	22870-14AC	22875-14AC
16	29	800	900	W=800mm	22830-16AC	22835-16AC	22840-16AC	22845-16AC	22850-16AC	22855-16AC	22860-16AC	22865-16AC	22870-16AC	22875-16AC
18	33	900	1000	W=800mm	22830-18AC	22835-18AC	22840-18AC	22845-18AC	22850-18AC	22855-18AC	22860-18AC	22865-18AC	22870-18AC	22875-18AC
21	37	1000	1100	W=800mm	22830-21AC	22835-21AC	22840-21AC	22845-21AC	22850-21AC	22855-21AC	22860-21AC	22865-21AC	22870-21AC	22875-21AC
23	41	1100	1200	W=800mm	22830-23AC	22835-23AC	22840-23AC	22845-23AC	22850-23AC	22855-23AC	22860-23AC	22865-23AC	22870-23AC	22875-23AC
25	45	1200	1300	W=800mm	22830-25AC	22835-25AC	22840-25AC	22845-25AC	22850-25AC	22855-25AC	22860-25AC	22865-25AC	22870-25AC	22875-25AC
27	49	1300	1400	W=800mm	22830-27AC	22835-27AC	22840-27AC	22845-27AC	22850-27AC	22855-27AC	22860-27AC	22865-27AC	22870-27AC	22875-27AC
30	53	1400	1500	W=800mm	22830-30AC	22835-30AC	22840-30AC	22845-30AC	22850-30AC	22855-30AC	22860-30AC	22865-30AC	22870-30AC	22875-30AC
32	57	1500	1600	W=800mm	22830-32AC	22835-32AC	22840-32AC	22845-32AC	22850-32AC	22855-32AC	22860-32AC	22865-32AC	22870-32AC	22875-32AC
34	61	1600	1700	W=800mm	22830-34AC	22835-34AC	22840-34AC	22845-34AC	22850-34AC	22855-34AC	22860-34AC	22865-34AC	22870-34AC	22875-34AC
36	65	1700	1800	W=800mm	22830-36AC	22835-36AC	22840-36AC	22845-36AC	22850-36AC	22855-36AC	22860-36AC	22865-36AC	22870-36AC	22875-36AC
39	69	1800	1900	W=800mm	22830-39AC	22835-39AC	22840-39AC	22845-39AC	22850-39AC	22855-39AC	22860-39AC	22865-39AC	22870-39AC	22875-39AC
41	73	1900	2000	W=800mm	22830-41AC	22835-41AC	22840-41AC	22845-41AC	22850-41AC	22855-41AC	22860-41AC	22865-41AC	22870-41AC	22875-41AC
43	77	2000	2100	W=800mm	22830-43AC	22835-43AC	22840-43AC	22845-43AC	22850-43AC	22855-43AC	22860-43AC	22865-43AC	22870-43AC	22875-43AC
45	81	2100	2200	W=800mm	22830-45AC	22835-45AC	22840-45AC	22845-45AC	22850-45AC	22855-45AC	22860-45AC	22865-45AC	22870-45AC	22875-45AC
48	85	2200	2300	W=800mm	22830-48AC	22835-48AC	22840-48AC	22845-48AC	22850-48AC	22855-48AC	22860-48AC	22865-48AC	22870-48AC	22875-48AC

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	21	600	700	W=800mm	22880-12AC	22885-12AC	22890-12AC	22895-12AC	228100-12AC	228105-12AC	228110-12AC	228115-12AC	228120-12AC
14	25	700	800	W=800mm	22880-14AC	22885-14AC	22890-14AC	22895-14AC	228100-14AC	228105-14AC	228110-14AC	228115-14AC	228120-14AC
16	29	800	900	W=800mm	22880-16AC	22885-16AC	22890-16AC	22895-16AC	228100-16AC	228105-16AC	228110-16AC	228115-16AC	228120-16AC
18	33	900	1000	W=800mm	22880-18AC	22885-18AC	22890-18AC	22895-18AC	228100-18AC	228105-18AC	228110-18AC	228115-18AC	228120-18AC
21	37	1000	1100	W=800mm	22880-21AC	22885-21AC	22890-21AC	22895-21AC	228100-21AC	228105-21AC	228110-21AC	228115-21AC	228120-21AC
23	41	1100	1200	W=800mm	22880-23AC	22885-23AC	22890-23AC	22895-23AC	228100-23AC	228105-23AC	228110-23AC	228115-23AC	228120-23AC
25	45	1200	1300	W=800mm	22880-25AC	22885-25AC	22890-25AC	22895-25AC	228100-25AC	228105-25AC	228110-25AC	228115-25AC	228120-25AC
27	49	1300	1400	W=800mm	22880-27AC	22885-27AC	22890-27AC	22895-27AC	228100-27AC	228105-27AC	228110-27AC	228115-27AC	228120-27AC
30	53	1400	1500	W=800mm	22880-30AC	22885-30AC	22890-30AC	22895-30AC	228100-30AC	228105-30AC	228110-30AC	228115-30AC	228120-30AC
32	57	1500	1600	W=800mm	22880-32AC	22885-32AC	22890-32AC	22895-32AC	228100-32AC	228105-32AC	228110-32AC	228115-32AC	228120-32AC
34	61	1600	1700	W=800mm	22880-34AC	22885-34AC	22890-34AC	22895-34AC	228100-34AC	228105-34AC	228110-34AC	228115-34AC	228120-34AC
36	65	1700	1800	W=800mm	22880-36AC	22885-36AC	22890-36AC	22895-36AC	228100-36AC	228105-36AC	228110-36AC	228115-36AC	228120-36AC
39	69	1800	1900	W=800mm	22880-39AC	22885-39AC	22890-39AC	22895-39AC	228100-39AC	228105-39AC	228110-39AC	228115-39AC	228120-39AC
41	73	1900	2000	W=800mm	22880-41AC	22885-41AC	22890-41AC	22895-41AC	228100-41AC	228105-41AC	228110-41AC	228115-41AC	228120-41AC
43	77	2000	2100	W=800mm	22880-43AC	22885-43AC	22890-43AC	22895-43AC	228100-43AC	228105-43AC	228110-43AC	228115-43AC	228120-43AC
45	81	2100	2200	W=800mm	22880-45AC	22885-45AC	22890-45AC	22895-45AC	228100-45AC	228105-45AC	228110-45AC	228115-45AC	228120-45AC
48	85	2200	2300	W=800mm	22880-48AC	22885-48AC	22890-48AC	22895-48AC	228100-48AC	228105-48AC	228110-48AC	228115-48AC	228120-48AC

The green color is the meaning for it's Width.
The red color is the meaning for it's Depth.
The light blue color is the meaning for it's Height.

Color choose :
5 - RAL7035 White
1 - RAL9011 Black

Side panel



Join Kit



Strengthening bar



Front Mounting



Rear Mounting



CLM-226/227/228xx-xxAA OpenRack

19"/21"/23"/24" width for server & communication system

CLM-226xx-xxAA


W=600mm



Application



CLM-226/227/228
OPENRACK

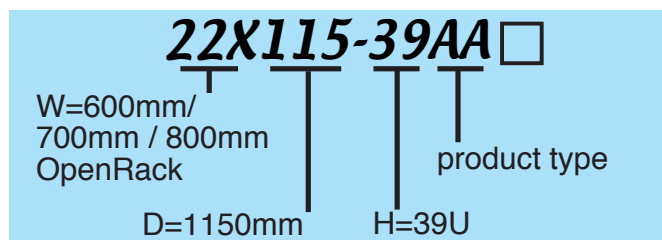

Catagories in D.I.Y. Packages

● Package of Main Frames

Crossbeams (CLM-882205-xxx)	G29
Accessory : 8 x Hexagon CAP M6 (CLM-662025-45)	
1 x L-shaped spanner (CLM-662100-06)	
32 x Self-tapping screw M4 (CLM-662125-10)	
25/50 x Self-tapping washer screw M6 (CLM-662009-12)	
25/50 x Cage Nut M6 (CLM-882003-06)	
6 x Dividing Piece (CLM-612769-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Main Frames & Mounting Angles

4 x Main Frame (CLM-882204-xx)	
4 x F-shaped Mounting Angles (CLM-612553-24xx)	G31
Accessory : 8 x Washers of F-shaped mounting angle (CLM-612590-00)	
16 x Self-tapping screw 12#24 (CLM-662056-10)	

● Package of Leveling Feet & Castor

4 x Leveling Feet (CLM-662031-60)	G32
--	------------

● Package of Depth Stays (CLM-882220)

2 x Depth Stays	G30~G31
Accessory : 16 x Self-tapping screw 12#24 (CLM-662056-10)	

"D.I.Y." exporting flat-package for saving long distance transportation and warehouse cost

CLM-227xx-xxAA

W=700mm



CLM-228xx-xxAA

W=800mm



Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm	700mm	750mm
12	21	600	700	W=600mm	22630-12AA	22635-12AA	22640-12AA	22645-12AA	22650-12AA	22655-12AA	22660-12AA	22665-12AA	22670-12AA	22675-12AA
14	25	700	800	W=600mm	22630-14AA	22635-14AA	22640-14AA	22645-14AA	22650-14AA	22655-14AA	22660-14AA	22665-14AA	22670-14AA	22675-14AA
16	29	800	900	W=600mm	22630-16AA	22635-16AA	22640-16AA	22645-16AA	22650-16AA	22655-16AA	22660-16AA	22665-16AA	22670-16AA	22675-16AA
18	33	900	1000	W=600mm	22630-18AA	22635-18AA	22640-18AA	22645-18AA	22650-18AA	22655-18AA	22660-18AA	22665-18AA	22670-18AA	22675-18AA
21	37	1000	1100	W=600mm	22630-21AA	22635-21AA	22640-21AA	22645-21AA	22650-21AA	22655-21AA	22660-21AA	22665-21AA	22670-21AA	22675-21AA
23	41	1100	1200	W=600mm	22630-23AA	22635-23AA	22640-23AA	22645-23AA	22650-23AA	22655-23AA	22660-23AA	22665-23AA	22670-23AA	22675-23AA
25	45	1200	1300	W=600mm	22630-25AA	22635-25AA	22640-25AA	22645-25AA	22650-25AA	22655-25AA	22660-25AA	22665-25AA	22670-25AA	22675-25AA
27	49	1300	1400	W=600mm	22630-27AA	22635-27AA	22640-27AA	22645-27AA	22650-27AA	22655-27AA	22660-27AA	22665-27AA	22670-27AA	22675-27AA
30	53	1400	1500	W=600mm	22630-30AA	22635-30AA	22640-30AA	22645-30AA	22650-30AA	22655-30AA	22660-30AA	22665-30AA	22670-30AA	22675-30AA
32	57	1500	1600	W=600mm	22630-32AA	22635-32AA	22640-32AA	22645-32AA	22650-32AA	22655-32AA	22660-32AA	22665-32AA	22670-32AA	22675-32AA
34	61	1600	1700	W=600mm	22630-34AA	22635-34AA	22640-34AA	22645-34AA	22650-34AA	22655-34AA	22660-34AA	22665-34AA	22670-34AA	22675-34AA
36	65	1700	1800	W=600mm	22630-36AA	22635-36AA	22640-36AA	22645-36AA	22650-36AA	22655-36AA	22660-36AA	22665-36AA	22670-36AA	22675-36AA
39	69	1800	1900	W=600mm	22630-39AA	22635-39AA	22640-39AA	22645-39AA	22650-39AA	22655-39AA	22660-39AA	22665-39AA	22670-39AA	22675-39AA
41	73	1900	2000	W=600mm	22630-41AA	22635-41AA	22640-41AA	22645-41AA	22650-41AA	22655-41AA	22660-41AA	22665-41AA	22670-41AA	22675-41AA
43	77	2000	2100	W=600mm	22630-43AA	22635-43AA	22640-43AA	22645-43AA	22650-43AA	22655-43AA	22660-43AA	22665-43AA	22670-43AA	22675-43AA
45	81	2100	2200	W=600mm	22630-45AA	22635-45AA	22640-45AA	22645-45AA	22650-45AA	22655-45AA	22660-45AA	22665-45AA	22670-45AA	22675-45AA
48	85	2200	2300	W=600mm	22630-48AA	22635-48AA	22640-48AA	22645-48AA	22650-48AA	22655-48AA	22660-48AA	22665-48AA	22670-48AA	22675-48AA

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	21	600	700	W=600mm	22680-12AA	22685-12AA	22690-12AA	22695-12AA	226100-12AA	226105-12AA	226110-12AA	226115-12AA	226120-12AA
14	25	700	800	W=600mm	22680-14AA	22685-14AA	22690-14AA	22695-14AA	226100-14AA	226105-14AA	226110-14AA	226115-14AA	226120-14AA
16	29	800	900	W=600mm	22680-16AA	22685-16AA	22690-16AA	22695-16AA	226100-16AA	226105-16AA	226110-16AA	226115-16AA	226120-16AA
18	33	900	1000	W=600mm	22680-18AA	22685-18AA	22690-18AA	22695-18AA	226100-18AA	226105-18AA	226110-18AA	226115-18AA	226120-18AA
21	37	1000	1100	W=600mm	22680-21AA	22685-21AA	22690-21AA	22695-21AA	226100-21AA	226105-21AA	226110-21AA	226115-21AA	226120-21AA
23	41	1100	1200	W=600mm	22680-23AA	22685-23AA	22690-23AA	22695-23AA	226100-23AA	226105-23AA	226110-23AA	226115-23AA	226120-23AA
25	45	1200	1300	W=600mm	22680-25AA	22685-25AA	22690-25AA	22695-25AA	226100-25AA	226105-25AA	226110-25AA	226115-25AA	226120-25AA
27	49	1300	1400	W=600mm	22680-27AA	22685-27AA	22690-27AA	22695-27AA	226100-27AA	226105-27AA	226110-27AA	226115-27AA	226120-27AA
30	53	1400	1500	W=600mm	22680-30AA	22685-30AA	22690-30AA	22695-30AA	226100-30AA	226105-30AA	226110-30AA	226115-30AA	226120-30AA
32	57	1500	1600	W=600mm	22680-32AA	22685-32AA	22690-32AA	22695-32AA	226100-32AA	226105-32AA	226110-32AA	226115-32AA	226120-32AA
34	61	1600	1700	W=600mm	22680-34AA	22685-34AA	22690-34AA	22695-34AA	226100-34AA	226105-34AA	226110-34AA	226115-34AA	226120-34AA
36	65	1700	1800	W=600mm	22680-36AA	22685-36AA	22690-36AA	22695-36AA	226100-36AA	226105-36AA	226110-36AA	226115-36AA	226120-36AA
39	69	1800	1900	W=600mm	22680-39AA	22685-39AA	22690-39AA	22695-39AA	226100-39AA	226105-39AA	226110-39AA	226115-39AA	226120-39AA
41	73	1900	2000	W=600mm	22680-41AA	22685-41AA	22690-41AA	22695-41AA	226100-41AA	226105-41AA	226110-41AA	226115-41AA	226120-41AA
43	77	2000	2100	W=600mm	22680-43AA	22685-43AA	22690-43AA	22695-43AA	226100-43AA	226105-43AA	226110-43AA	226115-43AA	226120-43AA
45	81	2100	2200	W=600mm	22680-45AA	22685-45AA	22690-45AA	22695-45AA	226100-45AA	226105-45AA	226110-45AA	226115-45AA	226120-45AA
48	85	2200	2300	W=600mm	22680-48AA	22685-48AA	22690-48AA	22695-48AA	226100-48AA	226105-48AA	226110-48AA	226115-48AA	226120-48AA

The green color is the meaning for it's Width.

The red color is the meaning for it's Depth.

The light blue color is the meaning for it's Height.

Color choose :

5 - RAL7035

White

1 - RAL9011

Black

Side panel



Join Kit



Strengthening bar



Front Mounting



Rear Mounting

Roof & Plinth Variants

For 226/227/228 AC

Roof (882440-xxx)



Feature :

The roof is a part of construction in CLM-226xx/227xx/228xx series production .It's a flat and stable for constaining apporiate loading on the top of openrack . It can also prevent the risk from above falling damage. The cable entry can manage cable system well by screwing some accessories on the holes of the frames .


Material : Sheet steel.

Finished : Powder Coating in RAL7035(Beige) & RAL 9011(Black).

CLM Part No. Lenght	Width 600mm	Width 700mm	Width 800mm	Packing No.
300	882440-630	882440-730	882440-830	882414-X30
350	882440-635	882440-735	882440-835	882414-X35
400	882440-640	882440-740	882440-840	882414-X40
450	882440-645	882440-745	882440-845	882414-X45
500	882440-650	882440-750	882440-850	882414-X50
550	882440-655	882440-755	882440-855	882414-X55
600	882440-660	882440-760	882440-860	882414-X60
650	882440-665	882440-765	882440-865	882414-X65
700	882440-670	882440-770	882440-870	882414-X70
750	882440-675	882440-775	882440-875	882414-X75
800	882440-680	882440-780	882440-880	882414-X80
850	882440-685	882440-785	882440-885	882414-X85
900	882440-690	882440-790	882440-890	882414-X90
950	882440-695	882440-795	882440-895	882414-X95
1000	882440-6100	882440-7100	882440-8100	882414-X100
1050	882440-6105	882440-7105	882440-8105	882414-X105
1100	882440-6110	882440-7110	882440-8110	882414-X110
1150	882440-6115	882440-7115	882440-8115	882414-X115
1200	882440-6120	882440-7120	882440-8120	882414-X120

Color choose : Fill number 5, 1 in the Final
 5 - RAL7035 Beige
 1 - RAL9011 Black

Plinth (882421-xxx)

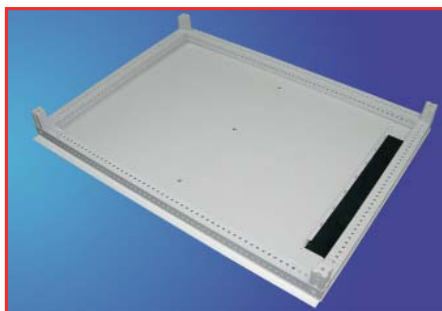

Feature :

The plinth is a part of construction in CLM-226xx/227xx/228xx series production .It's a flat and stable for constaining apporiate loading on the bottom of openrack .The cable entry can manage cable system well by screwing some accessories on the holes of the frames .

Material : Sheet steel.

Finished : Powder Coating in RAL7035(Beige) & RAL 9011(Black).

CLM Part No. Lenght	Width 600mm	Width 700mm	Width 800mm	Packing No.
300	882421-630	882421-730	882421-830	882414-X30
350	882421-635	882421-735	882421-835	882414-X35
400	882421-640	882421-740	882421-840	882414-X40
450	882421-645	882421-745	882421-845	882414-X45
500	882421-650	882421-750	882421-850	882414-X50
550	882421-655	882421-755	882421-855	882414-X55
600	882421-660	882421-760	882421-860	882414-X60
650	882421-665	882421-765	882421-865	882414-X65
700	882421-670	882421-770	882421-870	882414-X70
750	882421-675	882421-775	882421-875	882414-X75
800	882421-680	882421-780	882421-880	882414-X80
850	882421-685	882421-785	882421-885	882414-X85
900	882421-690	882421-790	882421-890	882414-X90
950	882421-695	882421-795	882421-895	882414-X95
1000	882421-6100	882421-7100	882421-8100	882414-X100
1050	882421-6105	882421-7105	882421-8105	882414-X105
1100	882421-6110	882421-7110	882421-8110	882414-X110
1150	882421-6115	882421-7115	882421-8115	882414-X115
1200	882421-6120	882421-7120	882421-8120	882414-X120

Color choose : Fill number 5, 1 in the Final
 5 - RAL7035 Beige
 1 - RAL9011 Black

Depth Stays Variants

For 226/227/228 AC & 24xxx


3.Depth Stays

Number of Depth Stays

Assembly Menu

	W=600	W=700	W=800
12U~20U	0	4	4
21U~34U	2	4	4
35U~43U	4	4	4
44U~48U	6	6	6

P.S. **Original Word** is the standard Depth Stays

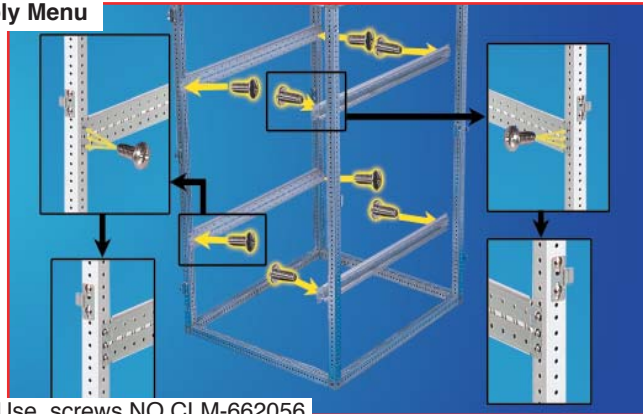

Use screws NO.CLM-662056

Depth stays

for 600mm width CLM-24xx 19" Rackmount products(882322-6xx19)



Depth stays with round-holes are adjustable on 25 mm pitch pattern up to 1137mm maximum .

Material: Sheet steel

Supply Included:

2 pcs depth stays

8 pcs Screw "CLM-662056-10"

Finished: Zinc Plated .

Stronger one is CLM-882220

Length (mm)	CLM Part No.	Single Stay No.	Packing No.
300	882322-63019	612645-30	2
350	882322-63519	612645-35	2
400	882322-64019	612645-40	2
450	882322-64519	612645-45	2
500	882322-65019	612645-50	2
550	882322-65519	612645-55	2
600	882322-66019	612645-60	2
650	882322-66519	612645-65	2
700	882322-67019	612645-70	2
750	882322-67519	612645-75	2

Length (mm)	CLM Part No.	Single Stay No.	Packing No.
800	882322-68019	612645-80	2
850	882322-68519	612645-85	2
900	882322-69019	612645-90	2
950	882322-69519	612645-95	2
1000	882322-610019	612645-100	2
1050	882322-610519	612645-105	2
1100	882322-611019	612645-110	2
1150	882322-611519	612645-115	2
1200	882322-612019	612645-120	2

Depth stays

for 600mm width CLM-24xx 19" Rackmount products(882220-8xx23)



The "U" type depth stays are punched with round-holes which are adjustable on pitch pattern up to maximum 25 mm . This is used for installation of 19" rackmounted products on the openrack with 700 mm width.

Material: Sheet steel

Supply Included:

2 pcs depth stays

8 pcs Screw "CLM-662056-10"

Finished: Zinc Plated .

Length (mm)	CLM Part No.	Single Stay No.	Packing No.
300	882220-83023	612577-30	2
350	882220-83523	612577-35	2
400	882220-84023	612577-40	2
450	882220-84523	612577-45	2
500	882220-85023	612577-50	2
550	882220-85523	612577-55	2
600	882220-86023	612577-60	2
650	882220-86523	612577-65	2
700	882220-87023	612577-70	2
750	882220-87523	612577-75	2


Length (mm)	CLM Part No.	Single Stay No.	Packing No.
800	882220-88023	612577-80	2
850	882220-88523	612577-85	2
900	882220-89523	612577-95	2
950	882220-89523	612577-95	2
1000	882220-810023	612577-100	2
1050	882220-810523	612577-105	2
1100	882220-811023	612577-110	2
1150	882220-811523	612577-115	2
1200	882220-812023	612577-120	2

CLM-226/227/228
OPENRACK

Depth Stays & Mounting Angles

For 226/227/228 AC & 24xxx

Depth stays for 800mm width CLM-24xx 19" Rackmounted products(882220-8xx19)



The "U" type depth stays are punched with round-holes which are adjustable on pitch pattern up to maximum 25 mm . This is used for installation of 19" rackmounted products on the openrack with 800 mm width .

Material: Sheet steel

Supply Included:

2 pcs depth stays

8 pcs Screw "CLM-662056-10"

Finished: Zinc Plated .

Length (mm)	CLM Part No.	Single Stay No.	Packing No.
300	882220-83019	612575-30	2
350	882220-83519	612575-35	2
400	882220-84019	612575-40	2
450	882220-84519	612575-45	2
500	882220-85019	612575-50	2
550	882220-85519	612575-55	2
600	882220-86019	612575-60	2
650	882220-86519	612575-65	2
700	882220-87019	612575-70	2
750	882220-87519	612575-75	2

Length (mm)	CLM Part No.	Single Stay No.	Packing No.
800	882220-88019	612575-80	2
850	882220-88519	612575-85	2
950	882220-89519	612575-95	2
950	882220-89519	612575-95	2
1000	882220-810019	612575-100	2
1050	882220-810519	612575-105	2
1100	882220-811019	612575-110	2
1150	882220-811519	612575-115	2
1200	882220-812019	612575-120	2

Others Depth Stays



For 700mm with CLM-24xx 21" Rackmount products

CLM Part Nio. 882220-7xx21

Single Stay No. 612579-7xx21



For 700mm with CLM-24xx 23" Rackmount products

CLM Part Nio. 882220-7xx23

Single Stay No. 612580-7xx21



For 800mm with CLM-24xx 21" Rackmount products

CLM Part Nio. 882220-8xx21

Single Stay No. 612576-xx



For 800mm with CLM-24xx 23" Rackmount products

CLM Part Nio. 882220-8xx23

Single Stay No. 612577-xx



For 800mm with CLM-24xx 24" Rackmount products

CLM Part Nio. 882220-8xx24

Single Stay No. 612578-xx

F-shaped Mounting Angle(612553)



Feature:

The F-shaped mounting angles are punched with square holes on a 25mm DIN 43660 pitch pattern. And it's directly attached to 600mm(W), 700mm(W), 800mm(W), so that cabinet's main frame for mounting slide-in 19" rack mounted components. Comes with 2 or 3 pair of depth stays on right & left side adjustable for irregular length 19" rackmounted components.

Material: Thickness Sheet steel.

Supply Includes: 1. 4 pcs mounting angles
2. 4 or 6 pcs Depth stays

Finished: Zinc- Plated.

CLM Part No.	Height	Packing Number	CLM Part No.	Height	Packing Number
12	882357-12	4	32	882357-32	4
14	882357-14	4	34	882357-34	4
16	882357-16	4	36	882357-36	4
18	882357-18	4	39	882357-39	4
21	882357-21	4	41	882357-41	4
23	882357-23	4	43	882357-43	4
25	882357-25	4	45	882357-45	4
27	882357-27	4	48	882357-48	4
30	882357-30	4			

CLM-226/227/228
OPENRACK

Castor & Leveling Feet

For 226/227/228 AC & 24xxx

Light-Duty Swival Castors (662132)

662132



For problem-free location changes.

Load capacity per castor:

25 kg static load

Supply Included :

8 x screws 12#24 "CLM-662056-10"

662131



CLM Part No.	Bracker	Packing No.	Number	For Model No.
662132-00	No	882349-00	4	CLM-24xxx (Rear Plinth)(12u~24u)
662131-00	Yes	882350-00	4	

Heavy-duty twin castor(662030)

CLM-662030-30



For problem-free location changes.M12 fixed thread.

Load capacity per castor:

200 Kg static load

Overall height: 100mm

CLM Part No.	Bracker	Packing No.	Number	For Model No.
662030-7538	No	882373-00	4	CLM-24xxx (25u~48u)
662030-7538S	Yes			(Optional Accessory)

Leveling feet (662031)



Leveling feet with large footprint protect floor surfaces against damage and accommodate uneven floor surfaces.

Load capacity per leveling foot :

300 Kg static load

CLM Part No.	Leight	Packing No.	Number	For Model No.
662031-80	80mm	882349-00	4	CLM-24xxx(12u~24u)

Leveling feet (882214)



Leveling feet with large footprint protect floor surfaces against damage and accommodate uneven floor surfaces.

Load capacity per leveling foot: :

200 Kg static load

Supply Included :

8 x screws 12#24 " CLM-662056-10 "

CLM Part No.	Number	For Model No.
882214-00	4	CLM-24xxx (25u~48u)

Light-Duty Rigid Castor (662134)(Optional Accessory)



For problem-free location changes.

Load capacity per castor:

50 kg static load

Supply Included :

8 x screws 12#24 "CLM-662056-10"

CLM Part No.	Bracker	Packing No.	Number	For Model No.
662134-00	No	882349-00	4	

CLM-226/227/228
OPENRACK

Roof Panel Variants

For 226/227/228 AC & 24xxx

Roof Panel in 2.4mm Height(882230)



Feature : The panel with fan-hole can set optional brush- strips as a cable entry and optional fans for ventilation .

Material : Thickness sheet steel.

FAN Panel : Yes


Finished : Powder coating in color RAL7035(Beige) or RAL9011(Black).

Supply Included :

2 x Crossbeams "CLM-882205" 1 x cover plate"CLM-612021"

8 x screws 12#24 "CLM-662056" 8 x screws M6 "CLM-662025"

1 x hexagon spanner "CLM-662100-06"

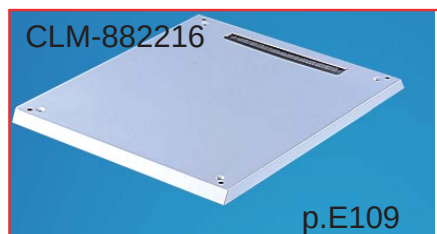

p.E109



p.E110



p.E112

CLM Part No.	Width 600mm	Width 700mm	Width 800mm
300	882230-630	882230-730	882230-830
350	882230-635	882230-735	882230-835
400	882230-640	882230-740	882230-840
450	882230-645	882230-745	882230-845
500	882230-650	882230-750	882230-850
550	882230-655	882230-755	882230-855
600	882230-660	882230-760	882230-860
650	882230-665	882230-765	882230-865
700	882230-670	882230-770	882230-870
750	882230-675	882230-775	882230-875
800	882230-680	882230-780	882230-880
850	882230-685	882230-785	882230-885
900	882230-690	882230-790	882230-890
950	882230-695	882230-795	882230-895
1000	882230-700	882230-800	882230-900
1050	882230-705	882230-805	882230-905
1100	882230-710	882230-810	882230-910
1150	882230-715	882230-815	882230-915
1200	882230-720	882230-820	882230-920

Color choose : Fill number 5, 1 in the Final


5 - RAL7035 Beige
1 - RAL9011 Black

If the depth is over 900mm and height is lower 34U



612490 U-shaped stay

Optional Accessories:



662037-12
Eye bolts M12 Thread.



882364-8039
Brush Strip

CLM-226/227/228
OPENRACK

Side Panel (882212)




Feature : The panels are set on the side of the cabinet used for protecting from dust & damage outside.

Material : Thickness sheet steel.

Finished : Powder coating in color RAL7035(Beige) or RAL9011(Black).

See more details in p.E112

Join Kit (CLM-24XXX Series) (CLM-612666)

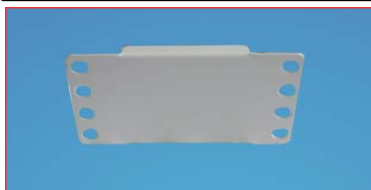


Feature :

It made stead and strong in combining several cabinet by join kits screwed on the main frames .

Material : sheet steel.

Finished :

Powder coating in color RAL 7035(beige) or RAL9011(black).



G35

Door Variants

For 226/227/228 AC & 24xxx

CLM-882259



Flat Tempered Glass Door

CLM-882232



Flat Tempered Glass Door (Vented)

CLM-882232



Vented Mesh R-shaped Door

CLM-882278




Vented Mesh Door

CLM-882278



Vented Honeycomb Door

CLM-882422

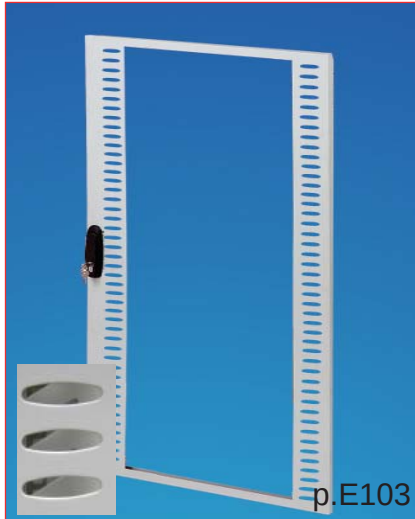

Flat Tempered Glass Door (Vented)

CLM-882269



Flat Door

CLM-882407



Multi-fuction Door


CLM-882208




Fan-holes Door

CLM-226/227/228
OPENRACK


CLM-226xx-xxAC Operation Manual

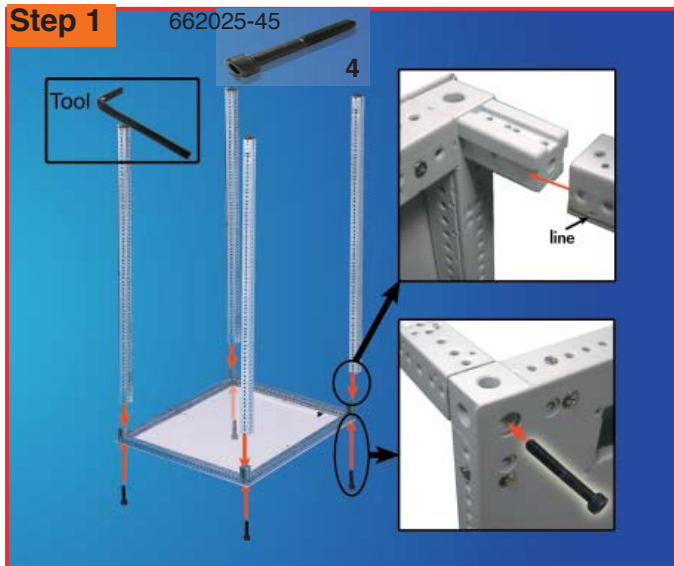


To set up the main frame by connecting 4 pcs strengthened bars onto bottom part by using hexagon screws & tool

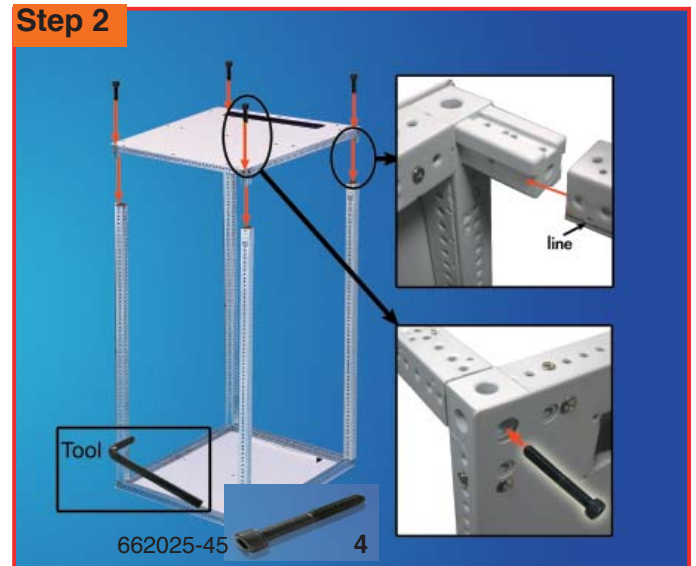


To set up the main frame by connecting 4 pcs strengthened bars onto roof part by using hexagon screws & tool .

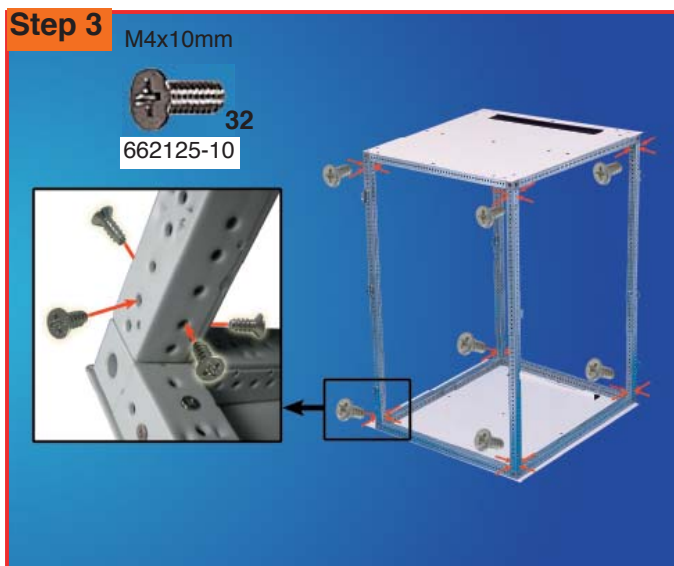


To fix 16 pcs screws into the corner connectors (per coner use 4 screws)

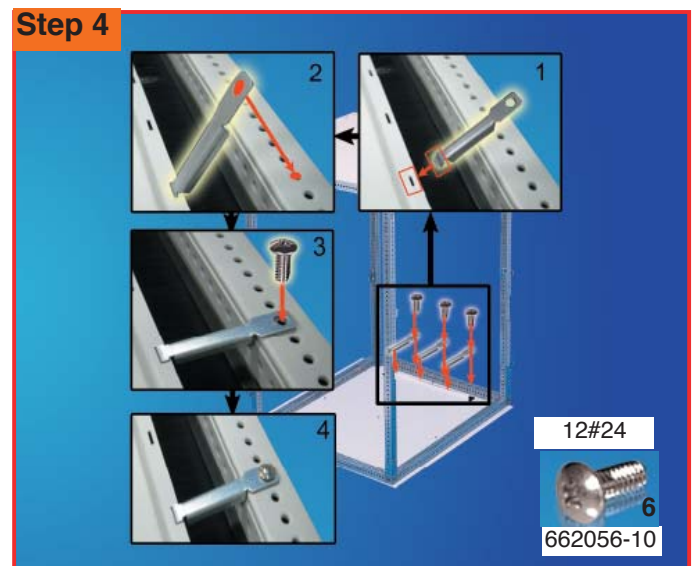

To set cable-dividing plates in roof of plinth

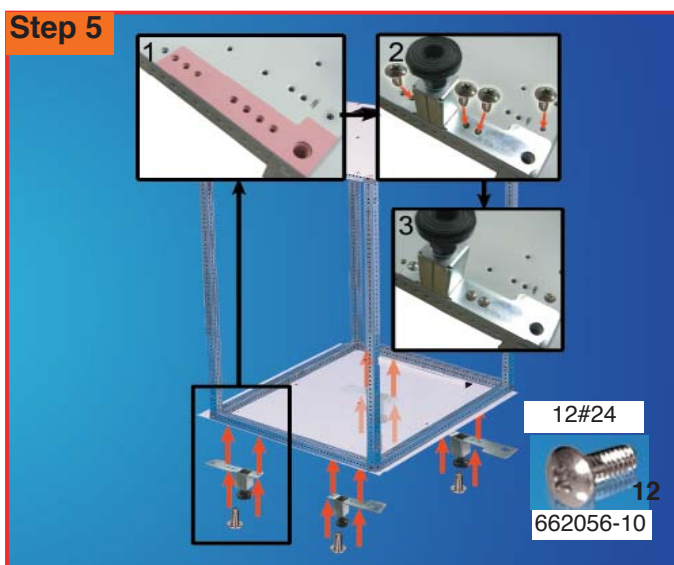

To fix 4 pcs leveling feet into the plinth

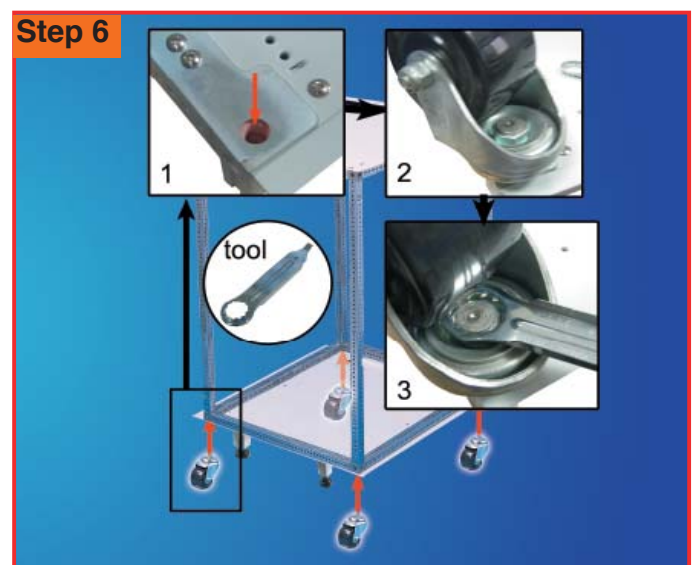

To fix 4 pcs castors into the plinth

Step 7



To fix depth stays on front & rear frames with screws

Step 8



To set 4 pcs F-shaped mounting angle onto the 7 top & bottom frame by 8 pcs washers & screws

Step 9



Complete view

Step 10



Application View

CLM-226/227/228
OPENRACK

CLM-226/227/228 Shipping Dimensions

CLM-226xx-xxAC Shipping Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Dimension	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm
12	21	600	700	W=600mm	2.16	2.40	2.64	2.89	3.13	3.37	3.61	3.86
14	25	700	800	W=600mm	2.23	2.47	2.72	2.96	3.20	3.44	3.69	3.93
16	29	800	900	W=600mm	2.30	2.54	2.79	3.03	3.27	3.51	3.76	4.00
18	33	900	1000	W=600mm	2.37	2.62	2.86	3.10	3.34	3.59	3.83	4.07
21	37	1000	1100	W=600mm	2.45	2.69	2.93	3.17	3.42	3.66	3.90	4.14
23	41	1100	1200	W=600mm	2.52	2.76	3.00	3.25	3.49	3.73	3.97	4.22
25	45	1200	1300	W=600mm	2.59	2.83	3.08	3.32	3.56	3.80	4.05	4.29
27	49	1300	1400	W=600mm	2.66	2.90	3.15	3.39	3.63	3.87	4.12	4.36
30	53	1400	1500	W=600mm	2.73	2.98	3.22	3.46	3.70	3.95	4.19	4.43
32	57	1500	1600	W=600mm	2.81	3.05	3.29	3.53	3.78	4.02	4.26	4.50
34	61	1600	1700	W=600mm	2.88	3.12	3.36	3.61	3.85	4.09	4.33	4.58
36	65	1700	1800	W=600mm	2.95	3.19	3.44	3.68	3.92	4.16	4.41	4.65
39	69	1800	1900	W=600mm	3.02	3.26	3.51	3.75	3.99	4.23	4.48	4.72
41	73	1900	2000	W=600mm	3.09	3.34	3.58	3.82	4.06	4.31	4.55	4.79
43	77	2000	2100	W=600mm	3.17	3.41	3.65	3.89	4.14	4.38	4.62	4.86
45	81	2100	2200	W=600mm	3.24	3.48	3.72	3.97	4.21	4.45	4.69	4.94
48	85	2200	2300	W=600mm	3.31	3.55	3.80	4.04	4.28	4.52	4.77	5.01

U	700mm	750mm	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	4.10	4.34	4.58	4.83	5.07	5.31	5.55	5.80	6.04	6.28	6.52
14	4.17	4.41	4.66	4.90	5.14	5.38	5.63	5.87	6.11	6.35	6.60
16	4.24	4.49	4.73	4.97	5.21	5.46	5.70	5.94	6.18	6.43	6.67
18	4.31	4.56	4.80	5.04	5.28	5.53	5.77	6.01	6.26	6.50	6.74
21	4.39	4.63	4.87	5.11	5.36	5.60	5.84	6.08	6.33	6.57	6.81
23	4.46	4.70	4.94	5.19	5.43	5.67	5.91	6.16	6.40	6.64	6.88
25	4.53	4.77	5.02	5.26	5.50	5.74	5.99	6.23	6.47	6.71	6.96
27	4.60	4.85	5.09	5.33	5.57	5.82	6.06	6.30	6.54	6.79	7.03
30	4.67	4.92	5.16	5.40	5.64	5.89	6.13	6.37	6.62	6.86	7.10
32	4.75	4.99	5.23	5.47	5.72	5.96	6.20	6.44	6.69	6.93	7.17
34	4.82	5.06	5.30	5.55	5.79	6.03	6.27	6.52	6.76	7.00	7.24
36	4.89	5.13	5.38	5.62	5.86	6.10	6.35	6.59	6.83	7.07	7.32
39	4.96	5.21	5.45	5.69	5.93	6.18	6.42	6.66	6.90	7.15	7.39
41	5.03	5.28	5.52	5.76	6.01	6.25	6.49	6.73	6.98	7.22	7.46
43	5.11	5.35	5.59	5.83	6.08	6.32	6.56	6.80	7.05	7.29	7.53
45	5.18	5.42	5.66	5.91	6.15	6.39	6.63	6.88	7.12	7.36	7.60
48	5.25	5.49	5.74	5.98	6.22	6.46	6.71	6.95	7.19	7.43	7.68

CLM-228xx-xxAC Shipping Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm
21	37	1000	1100	W=800mm	2.97	3.28	3.60	3.92	4.24	4.55	4.87	5.19
23	41	1100	1200	W=800mm	3.04	3.36	3.67	3.99	4.31	4.63	4.94	5.26
25	45	1200	1300	W=800mm	3.11	3.43	3.75	4.06	4.38	4.70	5.02	5.33
27	49	1300	1400	W=800mm	3.18	3.50	3.82	4.14	4.45	4.77	5.09	5.41
30	53	1400	1500	W=800mm	3.26	3.57	3.89	4.21	4.52	4.84	5.16	5.48
32	57	1500	1600	W=800mm	3.33	3.64	3.96	4.28	4.60	4.91	5.23	5.55
34	61	1600	1700	W=800mm	3.40	3.72	4.03	4.35	4.67	4.99	5.30	5.62
36	65	1700	1800	W=800mm	3.47	3.79	4.11	4.42	4.74	5.06	5.38	5.69
39	69	1800	1900	W=800mm	3.54	3.86	4.18	4.50	4.81	5.13	5.45	5.77
41	73	1900	2000	W=800mm	3.62	3.93	4.25	4.57	4.88	5.20	5.52	5.84
43	77	2000	2100	W=800mm	3.69	4.00	4.32	4.64	4.96	5.27	5.59	5.91
45	81	2100	2200	W=800mm	3.76	4.08	4.39	4.71	5.03	5.35	5.66	5.98
48	85	2200	2300	W=800mm	3.83	4.15	4.47	4.78	5.10	5.42	5.74	6.05

CLM-226/227/228
OPEN RACK

CLM-227xx-xxAC Shipping Dimensions

U	SU	Height (mm)	T.H. (mm)	Depth Model No.	300mm	350mm	400mm	450mm	500mm	550mm	600mm	650mm
12	21	600	700	W=700mm	2.42	2.70	2.98	3.26	3.54	3.82	4.10	4.38
14	25	700	800	W=700mm	2.49	2.77	3.05	3.33	3.61	3.89	4.17	4.45
16	29	800	900	W=700mm	2.56	2.84	3.12	3.40	3.68	3.96	4.24	4.52
18	33	900	1000	W=700mm	2.63	2.91	3.19	3.47	3.75	4.03	4.31	4.59
21	37	1000	1100	W=700mm	2.71	2.99	3.27	3.55	3.83	4.11	4.39	4.67
23	41	1100	1200	W=700mm	2.78	3.06	3.34	3.62	3.90	4.18	4.46	4.74
25	45	1200	1300	W=700mm	2.85	3.13	3.41	3.69	3.97	4.25	4.53	4.81
27	49	1300	1400	W=700mm	2.92	3.20	3.48	3.76	4.04	4.32	4.60	4.88
30	53	1400	1500	W=700mm	2.99	3.27	3.55	3.83	4.11	4.39	4.67	4.95
32	57	1500	1600	W=700mm	3.07	3.35	3.63	3.91	4.19	4.47	4.75	5.03
34	61	1600	1700	W=700mm	3.14	3.42	3.70	3.98	4.26	4.54	4.82	5.10
36	65	1700	1800	W=700mm	3.21	3.49	3.77	4.05	4.33	4.61	4.89	5.17
39	69	1800	1900	W=700mm	3.28	3.56	3.84	4.12	4.40	4.68	4.96	5.24
41	73	1900	2000	W=700mm	3.35	3.63	3.91	4.19	4.47	4.75	5.03	5.31
43	77	2000	2100	W=700mm	3.43	3.71	3.99	4.27	4.55	4.83	5.11	5.39
45	81	2100	2200	W=700mm	3.50	3.78	4.06	4.34	4.62	4.90	5.18	5.46
48	85	2200	2300	W=700mm	3.57	3.85	4.13	4.41	4.69	4.97	5.25	5.53

U	700mm	750mm	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
12	4.66	4.94	5.22	5.50	5.78	6.06	6.34	6.62	6.90	7.18	7.46
14	4.73	5.01	5.29	5.57	5.85	6.13	6.41	6.69	6.97	7.25	7.53
16	4.80	5.08	5.36	5.64	5.92	6.20	6.48	6.76	7.04	7.32	7.60
18	4.87	5.15	5.43	5.71	5.99	6.27	6.55	6.83	7.11	7.39	7.67
21	4.95	5.23	5.51	5.79	6.07	6.35	6.63	6.91	7.19	7.47	7.75
23	5.02	5.30	5.58	5.86	6.14	6.42	6.70	6.98	7.26	7.54	7.82
25	5.09	5.37	5.65	5.93	6.21	6.49	6.77	7.05	7.33	7.61	7.89
27	5.16	5.44	5.72	6.00	6.28	6.56	6.84	7.12	7.40	7.68	7.96
30	5.23	5.51	5.79	6.07	6.35	6.63	6.91	7.19	7.47	7.75	8.03
32	5.31	5.59	5.87	6.15	6.43	6.71	6.99	7.27	7.55	7.83	8.11
34	5.38	5.66	5.94	6.22	6.50	6.78	7.06	7.34	7.62	7.90	8.18
36	5.45	5.73	6.01	6.29	6.57	6.85	7.13	7.41	7.69	7.97	8.25
39	5.52	5.80	6.08	6.36	6.64	6.92	7.20	7.48	7.76	8.04	8.32
41	5.59	5.87	6.15	6.43	6.71	6.99	7.27	7.55	7.83	8.11	8.39
43	5.67	5.95	6.23	6.51	6.79	7.07	7.35	7.63	7.91	8.19	8.47
45	5.74	6.02	6.30	6.58	6.86	7.14	7.42	7.70	7.98	8.26	8.54
48	5.81	6.09	6.37	6.65	6.93	7.21	7.49	7.77	8.05	8.33	8.61

CLM-226/227/228
OPENRACK

CLM-228xx-xxAC Shipping Dimensions

U	700mm	750mm	800mm	850mm	900mm	950mm	1000mm	1050mm	1100mm	1150mm	1200mm
21	5.51	5.82	6.14	6.46	6.78	7.09	7.41	7.73	8.05	8.36	8.68
23	5.58	5.90	6.21	6.53	6.85	7.17	7.48	7.80	8.12	8.44	8.75
25	5.65	5.97	6.29	6.60	6.92	7.24	7.56	7.87	8.19	8.51	8.82
27	5.72	6.04	6.36	6.67	6.99	7.31	7.63	7.94	8.26	8.58	8.90
30	5.79	6.11	6.43	6.75	7.06	7.38	7.70	8.02	8.33	8.65	8.97
32	5.87	6.18	6.50	6.82	7.14	7.45	7.77	8.09	8.41	8.72	9.04
34	5.94	6.26	6.57	6.89	7.21	7.53	7.84	8.16	8.48	8.80	9.11
36	6.01	6.33	6.65	6.96	7.28	7.60	7.92	8.23	8.55	8.87	9.19
39	6.08	6.40	6.72	7.04	7.35	7.67	7.99	8.30	8.62	8.94	9.26
41	6.15	6.47	6.79	7.11	7.42	7.74	8.06	8.38	8.69	9.01	9.33
43	6.23	6.54	6.86	7.18	7.50	7.81	8.13	8.45	8.77	9.08	9.40
45	6.30	6.62	6.93	7.25	7.57	7.89	8.20	8.52	8.84	9.16	9.47
48	6.37	6.69	7.01	7.32	7.64	7.96	8.28	8.59	8.91	9.23	9.55